



CLIENT
JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT
Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

1 OVERALL SITE LANDSCAPE PLAN
SCALE: 1"=100'-0"

Landscape Calculations/Requirements

Street Frontage: (For all Districts) One (1) tree shall be planted for each thirty (30) feet of street frontage, within 20' setback.
(For Commercial Districts) One (1) shrub shall be provided for each twenty (20) feet of street frontage.
No Plants In ROW.

REQUIREMENTS
MET.

Open Yard Areas:	Pad/Lot #	Pad/Lot Size	Bldg. Size	Open Space (Sf)	# Trees Req.	# Trees Prov.	# Shrubs Req.	# Shrubs Prov.
2 shrubs per 5000 sf of total lot area, excluding building footprint area.	Pad 1	85,723	4,882	80,841	16	16	16	16
All portions of the site not covered with paving or buildings shall be landscaped.	Pad 2	84,883	6,802	78,081	16	16	16	16
1 tree per 5000 sf of total lot area, excluding building footprint area.	Pad 3	62,083	4,078	58,005	12	12	12	12
	Pad 4	206,260	37,782 (per Fl)	168,478	34	34	34	34

Parking Lot Areas: Deciduous shade trees shall be provided within any parking lot designed or intended to accommodate ten (10) cars or more.

REQUIREMENTS
MET.

Parking Lot Islands: Landscape islands shall constitute at least 5% of the entire area devoted to parking spaces, aisles and driveways.
A landscape island shall be provided at the end of every parking bay.
Tree planting areas shall be 10' wide min.


Pad/Lot #	Parking Size (Sf)	Open Space Req.	Open Space Prov.
Pad 1	37,902	1,895	4,493
Pad 2	42,899	2,145	3,974
Pad 3	34,318	1,715	2,219
Pad 4	32,861	1,643	3,926

Parking Lot Screening: Screening to a height of two-and-one-half (2.5) feet must be provided along the edge of the parking lot or loading area closest to and parallel to the street.
100% opaque.
12 shrubs per 40 linear feet that will spread into a continuous visual screen within two (2) growing seasons. Shrubs must be at least eighteen (18) inches tall at the time of planting.

Pad/Lot #	LF Parking Prov.	# Shrubs Req.	# Shrubs Prov.
Pad 1	592	177	177
Pad 2	835	251	251
Pad 3	615	184	184
Pad 4	397	119	119

Buffer Screening: Buffers must be 20' wide. (Screen B buffer type):
1 Shade Tree per 1000 sf.
1 Ornamental Tree per 500 sf.
1 evergreen tree per 300 sf.
Shrubs Provided at 1 per 200 sf.

REQUIREMENTS
MET.

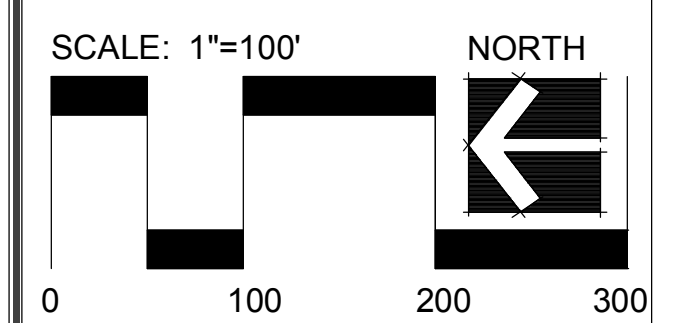

Date: 5.22.18

Landscape Plan

L1

Planting Notes

1. Location of all existing utilities needs to be done before commencing work.
2. The planting plan graphically illustrates overall plant massings. Each plant species massing shall be placed in the field to utilize the greatest coverage of ground plane. The following applies for individual plantings:
 - a. Creeping groundcover shall be a minimum of 6" from paving edge.
 - b. All trees shall be a minimum of 3' from paving edge.
 - c. All plants of the same species shall be equally spaced apart and placed for best aesthetic viewing.
 - d. All shrubs shall be a minimum of 2' from paved edge.
3. Mulch all planting bed areas to a minimum depth of 3". Mulch individual trees to a minimum depth of 4".
4. Note: If plants are not labeled - they are existing and shall remain.
5. All landscaped areas in ROW shall be sodded and irrigated unless otherwise specified.

- Materials:**
1. Plant material shall be healthy, vigorous, and free of disease and insects as per AAN standards.
 2. Shredded bark mulch installed at trees shall be finely chipped and shredded hardwood chips, consisting of pure wood products and free of all other foreign substances. Pine bark compost mulch installed at planting bed areas shall be free of all other foreign substances.

- Installation:**
1. All planting beds shall be amended with 1 cubic yard of peat moss per 1,000 square feet. Till peat moss into soil to a 6" depth. A 10-10-10 fertilizer shall be spread over all planting areas prior to planting, at a rate of 50 pounds per 2,000 square feet.
 2. After plants have been installed, all planting beds shall be treated with Dacthal pre-emergent herbicide prior to mulch application.
 3. Plant pit backfill for trees and shrubs shall be 50% peat or well composted manure and 50% topsoil.
 4. Plant material shall be maintained and guaranteed for a period of one year after Owner's acceptance of finished job. All dead or damaged plant material shall be replaced at Landscape Contractor's expense.
 5. Landscape contractor shall maintain all plant material until final acceptance, at which point the one year guarantee begins.

Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
	98	Gleditsia triacanthos 'Skyline'	Shademaster Honeylocust	3"	6'	min. clear, ground to canopy	
	212	Platanus x acerifolia	London Plane Tree	3"	6'	min. clear, ground to canopy	
	221	Acer x truncatum 'Warrenred'	Pacific Sunset Maple	3"	6'	min. clear, ground to canopy	
	230	Quercus bicolor	Swamp White Oak	3"	6'	min. clear, ground to canopy	
	242	Acer griseum	Paperbark Maple	3"	6'	min. clear, ground to canopy	
	124	Ulmus parvifolia	Laobark Elm	3"	6'	min. clear, ground to canopy	
EVERGREEN TREES							
	34	Juniperus chinensis 'Keteleer'	Keteleer Juniper	8" ht.		symmetrical pyramidal form	
	00	Picea abies	Norway Spruce	8" ht.		symmetrical pyramidal form	

Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
	00	Cercis canadensis	Eastern Redbud			1.5"	
DECIDUOUS SHRUBS/GRASSES							
	52	Liriope muscari 'Variegated'	Variegated Liriope	1 gal.			Plant @ 18" O.C.
	32	Spiraea x bumalda 'Goldflame'	Goldflame spirea	3 gal. 18" ht. min.			Plant @ 3' O.C.
	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia	3 gal. 18" ht. min.			Plant @ 4' O.C.
	197	Syringa X 'Panda'	Blooming Purple Lilac	5 gal. 18" ht. min.			Plant @ 5' O.C.
EVERGREEN SHRUBS							
	208	Juniperus chinensis 'Sea Green'	Sea Green Juniper	3 gal. 18" ht. min.			Plant @ 4' O.C.
	182	Juniperus chinensis 'Gold Coast'	Gold Coast Juniper	3 gal. 18" ht. min.			Plant @ 4' O.C.




Landscape Architecture
Real Estate Consulting
3692 W. 179th Terr.
Stilwell, KS 66085
913.787.2817



CLIENT
JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT
Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

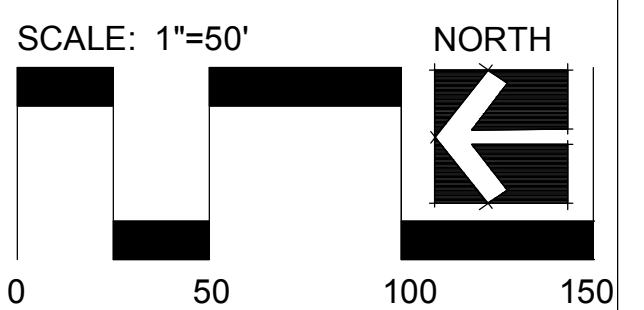

Date: 5.22.18

Landscape Plan


L2

Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
	98	Gleditsia triacanthos "Skyline"	Shademaster Honeylocust		3"	6' min. clear., ground to canopy	
	212	Platanus x acerifolia	London Plane Tree		3"	6' min. clear., ground to canopy	
	221	Acer x truncatum "Warrenred"	Pacific Sunset Maple		3"	6' min. clear., ground to canopy	
	230	Quercus bicolor	Swamp White Oak		3"	6' min. clear., ground to canopy	
	242	Acer griseum	Paperbark Maple		3"	6' min. clear., ground to canopy	
	124	Ulmus parvifolia	lacebark Elm		3"	6' min. clear., ground to canopy	
EVERGREEN TREES							
	34	Juniperus chinensis "Keteleeri"	Keteleeri Juniper		8" ht.	symmetrical pyramidal form	
	00	Picea abies	Norway Spruce		8" ht.	symmetrical pyramidal form	

Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
	00	Cercis canadensis	Eastern Redbud			1.5"	
DECIDUOUS SHRUBS/GRASSES							
	52	Liriodendron "Variegated"	Variegated Liriodendron		1 gal.		Plant @ 18" O.C.
	32	Spiraea x bumalda "Goldflame"	Goldflame spiraea		3 gal. 18" ht. min.		Plant @ 3' O.C.
	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia		3 gal. 18" ht. min.		Plant @ 4' O.C.
	197	Syringa X "Penda"	Blooming Purple Lilac		5 gal. 18" ht. min.		Plant @ 5' O.C.
EVERGREEN SHRUBS							
	208	Juniperus chinensis "Sea Green"	Sea Green Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.
	182	Juniperus chinensis "Gold Coast"	Gold Coast Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.

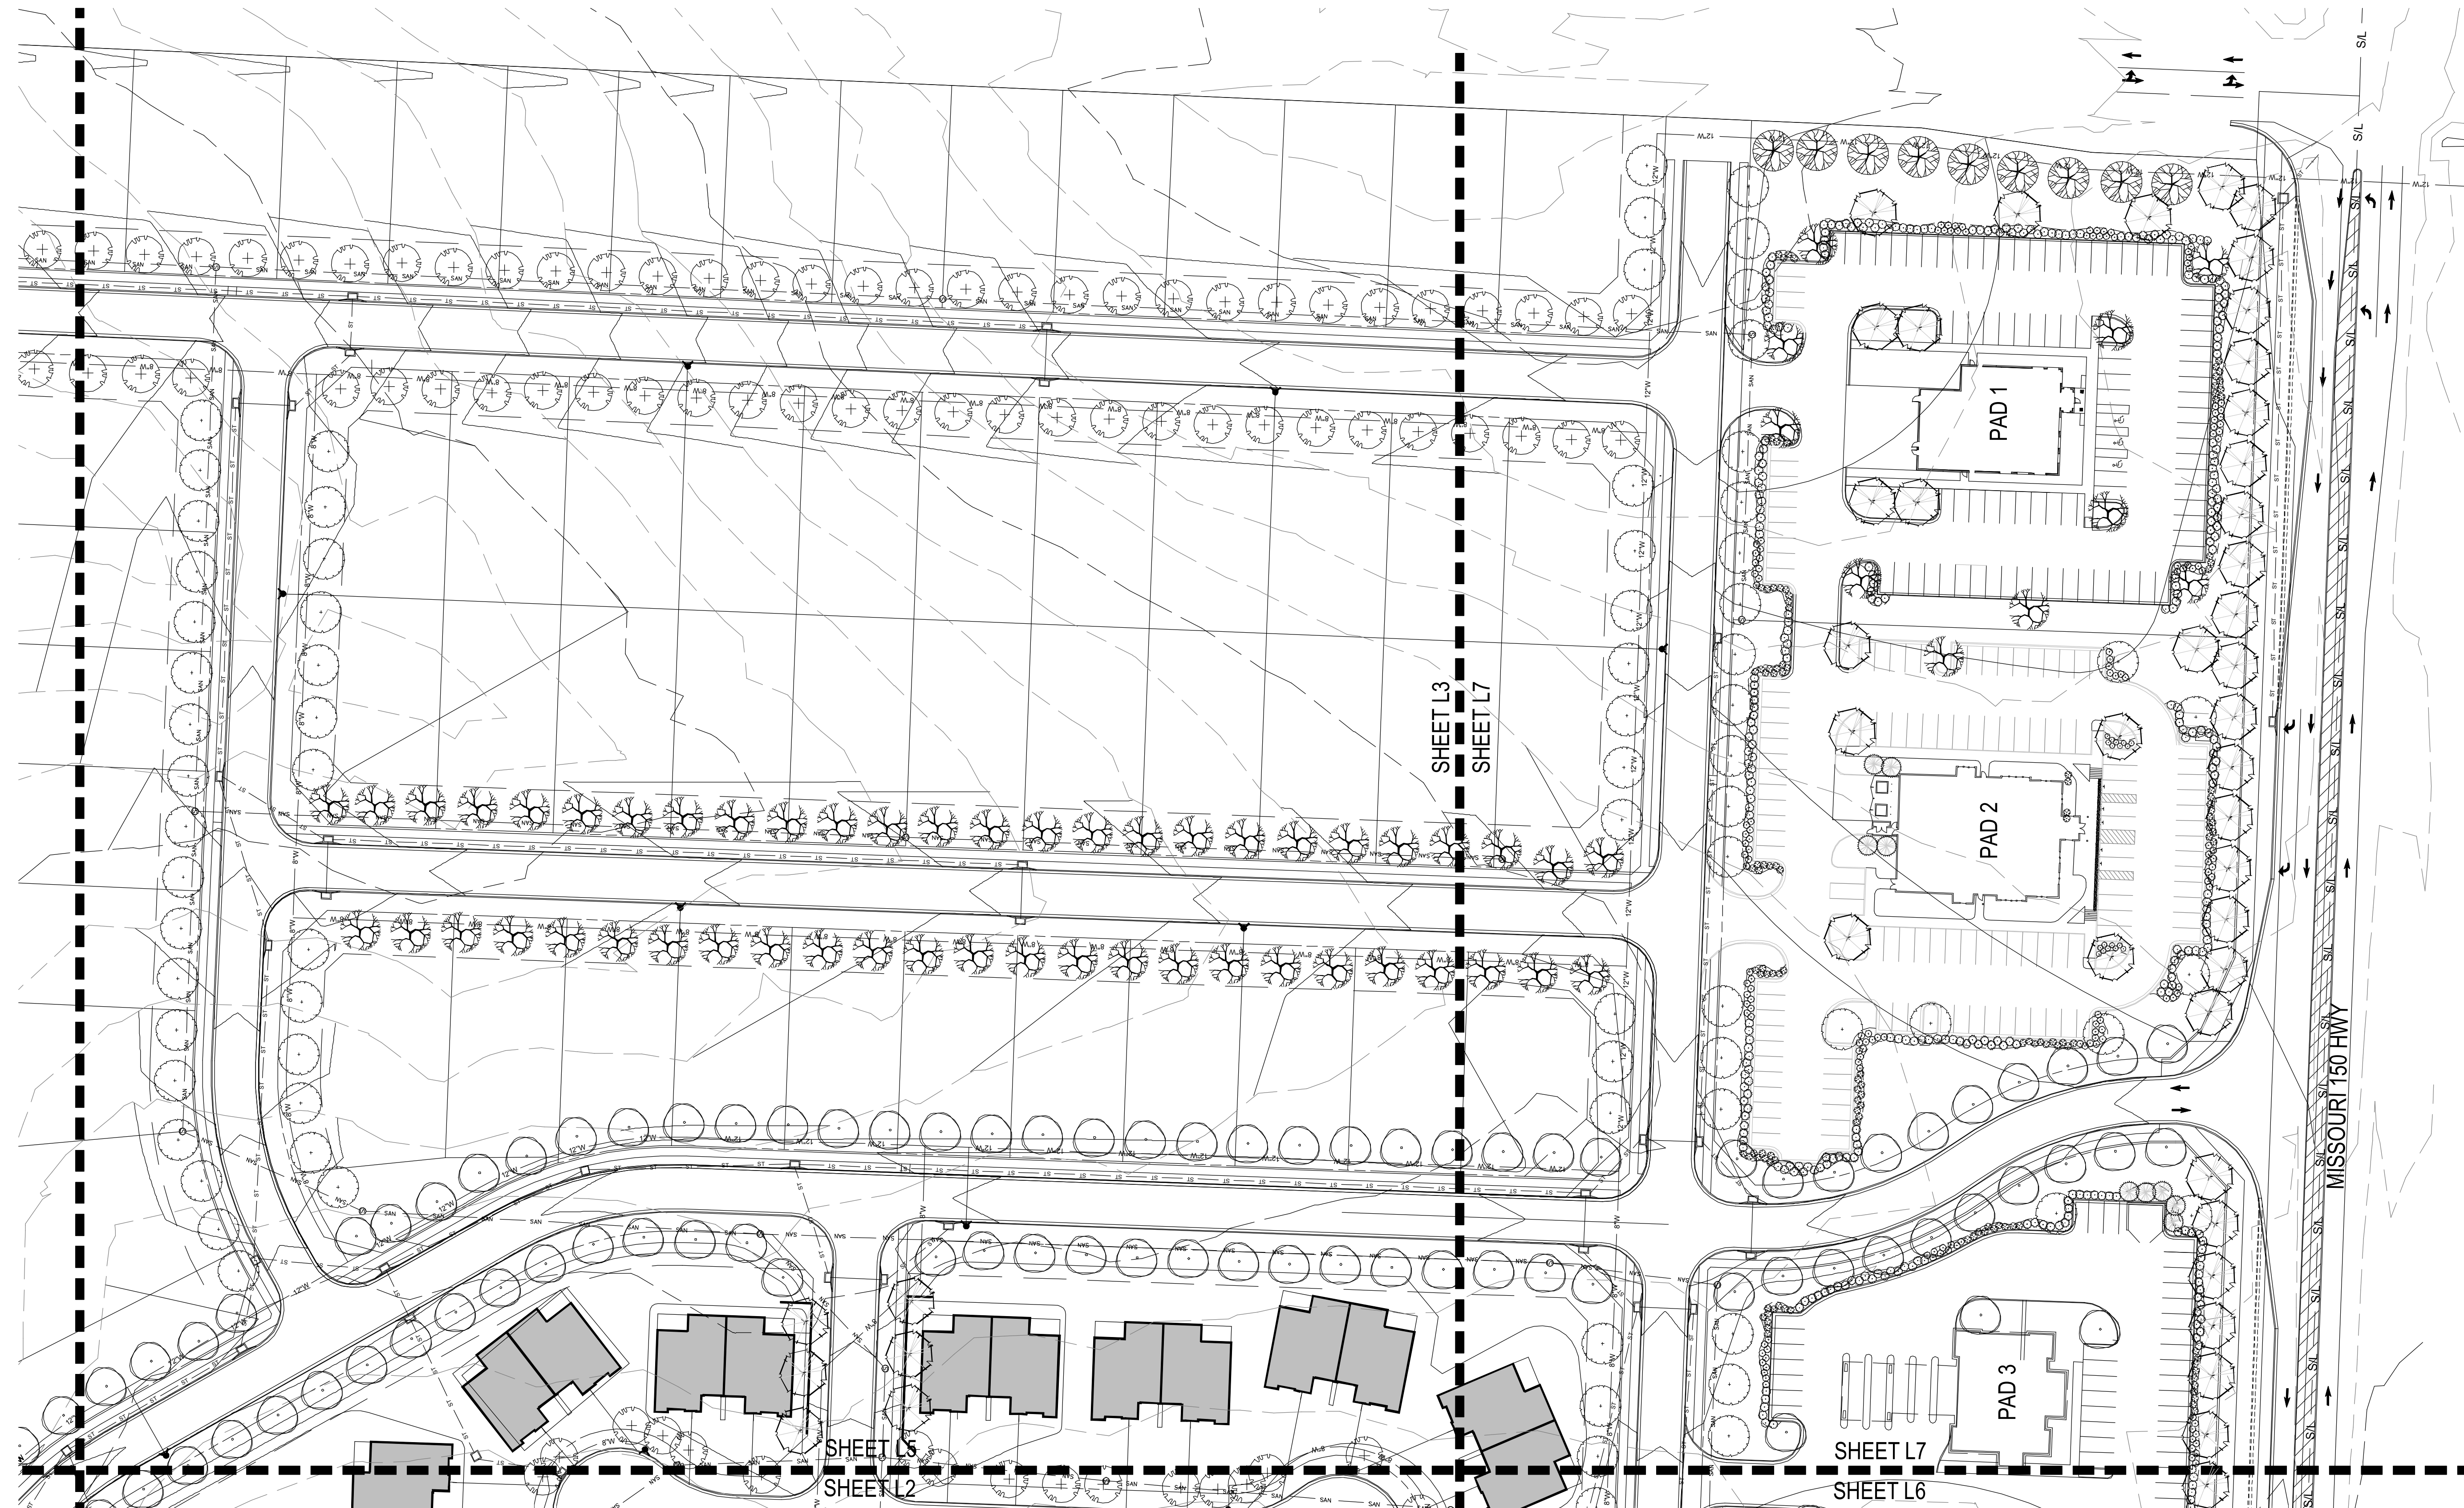


1 LANDSCAPE PLAN ENLARGEMENT
SCALE: 1"=50'-0"



CLIENT
JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT
Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

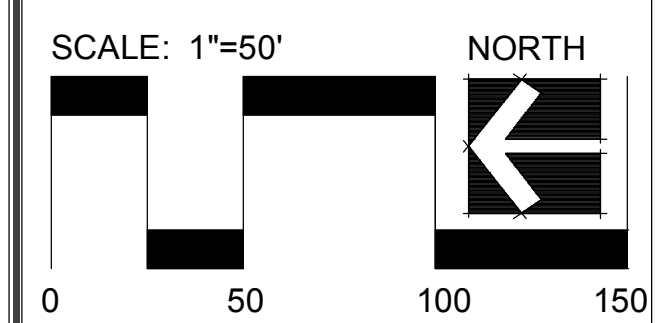

Date: 5.22.18

Landscape Plan


- TREE PLANTING NOTES:**
- DO NOT HEAVILY PRUNE THE TREE. PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, & BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS & LATERAL BRANCHES MAY BE PRUNED. DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN
 - MARK THE NORTH SIDE OF THE TREE IN THE NURSERY, AND ROTATE TREE TO FACE NORTH AT THE SITE WHENEVER POSSIBLE
 - SET TOP OF ROOT BALL 1-2 INCHES HIGHER THAN SURROUNDING GRADE
 - APPLY 4" THK WOOD MULCH. DO NOT PLACE MULCH IN DIRECT CONTACT W/ TREE TRUNK
 - EACH TREE MUST BE PLANTED SUCH THE TRUNK FLARE IS VISIBLE AT THE TOP OF THE ROOT BALL. TREES WHERE THE FLARE IS NOT VISIBLE SHALL BE REJECTED. DO NOT COVER THE TOP OF THE ROOT BALL W/ SOIL
 - REMOVE ALL TWINE, ROPE, WIRE AND BURLAP FROM THE UPPER 1/3 OF ROOT BALL (REMOVE WIRE BASKETS)
 - PLACE ALL ROOT BALLS ON UN-EXCAVATED OR TAMPED SOIL. TYP

- STAKING REQUIREMENTS:**
- WIRE / CABLE SHALL BE GALV. 12-GAUGE
 - TIGHTEN WIRE / CABLE ONLY ENOUGH TO KEEP FROM SLIPPING. ALLOW FOR SOME TRUNK MOVEMENT. PLASTIC HOSE SHALL BE LONG ENOUGH TO ACCOMMODATE 1/2" OF GROWTH
 - STAKES SHALL BE 2"x 2" HARDWOOD OR EQUAL

- PERENNIAL PLANTING NOTES:**
- APPLY 2" THK BED OF MULCH ON PERENNIAL PLANT BED. DO NOT COVER PLANTS
 - THOROUGHLY MIX PEAT IN TOP 3-4" OF SOIL
 - BREAK UP EXISTING SOIL TO A DEPTH OF 2-4"
 - PROVIDE NEW TOPSOIL TO A DEPTH OF 12"

- SHRUB PLANTING NOTES:**
- SET SHRUB AT SAME DEPTH AT WHICH IT GREW IN THE FIELD OR CONTAINER
 - PRUNE, THIN & SHAPE SHRUBS IN ACCORDANCE W/ STANDARD HORTICULTURAL PRACTICE

INITIAL WATERING: WHEN BACKFILL IS 2/3 COMPLETE, WATER THOROUGHLY UNTIL MORE IS ABSORBED

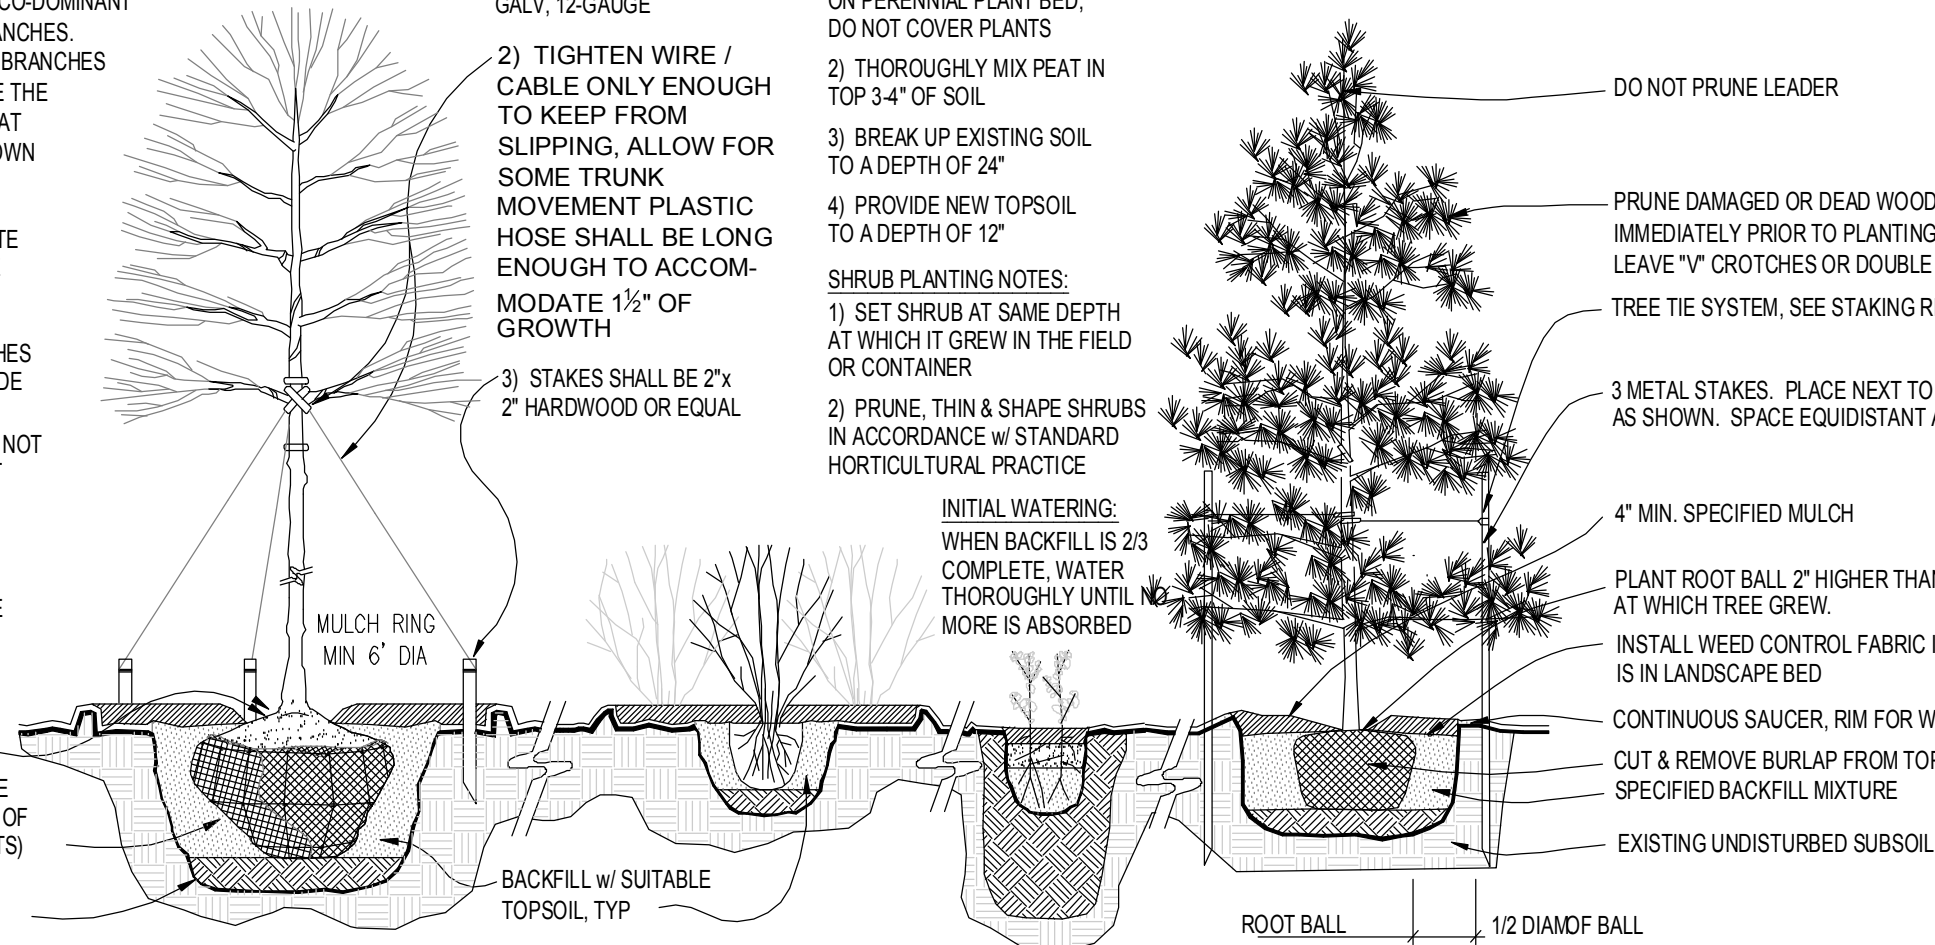


Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
(Symbol)	98	Gleditsia triacanthos 'Skyline'	Shademaster Honeylocust			3"	6' min. clear., ground to canopy
(Symbol)	212	Platanus x acerifolia	London Plane Tree			3"	6' min. clear., ground to canopy
(Symbol)	221	Acer x truncatum 'Warrenred'	Pacific Sunset Maple			3"	6' min. clear., ground to canopy
(Symbol)	230	Quercus bicolor	Swamp White Oak			3"	6' min. clear., ground to canopy
(Symbol)	242	Acer griseum	Paperbark Maple			3"	6' min. clear., ground to canopy
(Symbol)	124	Ulmus parvifolia	Lacebark Elm			3"	6' min. clear., ground to canopy
EVERGREEN TREES							
(Symbol)	34	Juniperus chinensis 'Keteleeri'	Keteleeri Juniper		8' Ht.		symmetrical pyramidal form
(Symbol)	00	Picea abies	Norway Spruce		8' Ht.		symmetrical pyramidal form

Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
(Symbol)	00	Cercia canadensis	Eastern Redbud				1.5"
DECIDUOUS SHRUBS/GRASSES							
(Symbol)	52	Liriope muscari 'Variegata'	Variegated Liriope		1 gal.		Plant @ 18" O.C.
(Symbol)	32	Spiraea x bumalda 'Goldflame'	Goldflame spiraea		3 gal. 18" ht. min.		Plant @ 3' O.C.
(Symbol)	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia		3 gal. 18" ht. min.		Plant @ 4' O.C.
(Symbol)	197	Syringa X 'Penda'	Blooming Purple Lilac		5 gal. 18" ht. min.		Plant @ 5' O.C.
EVERGREEN SHRUBS							
(Symbol)	208	Juniperus chinensis 'Sea Green'	Sea Green Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.
(Symbol)	182	Juniperus chinensis 'Gold Coast'	Gold Coast Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.

1 PLANTING INSTALLATION DETAILS
SCALE: NTS

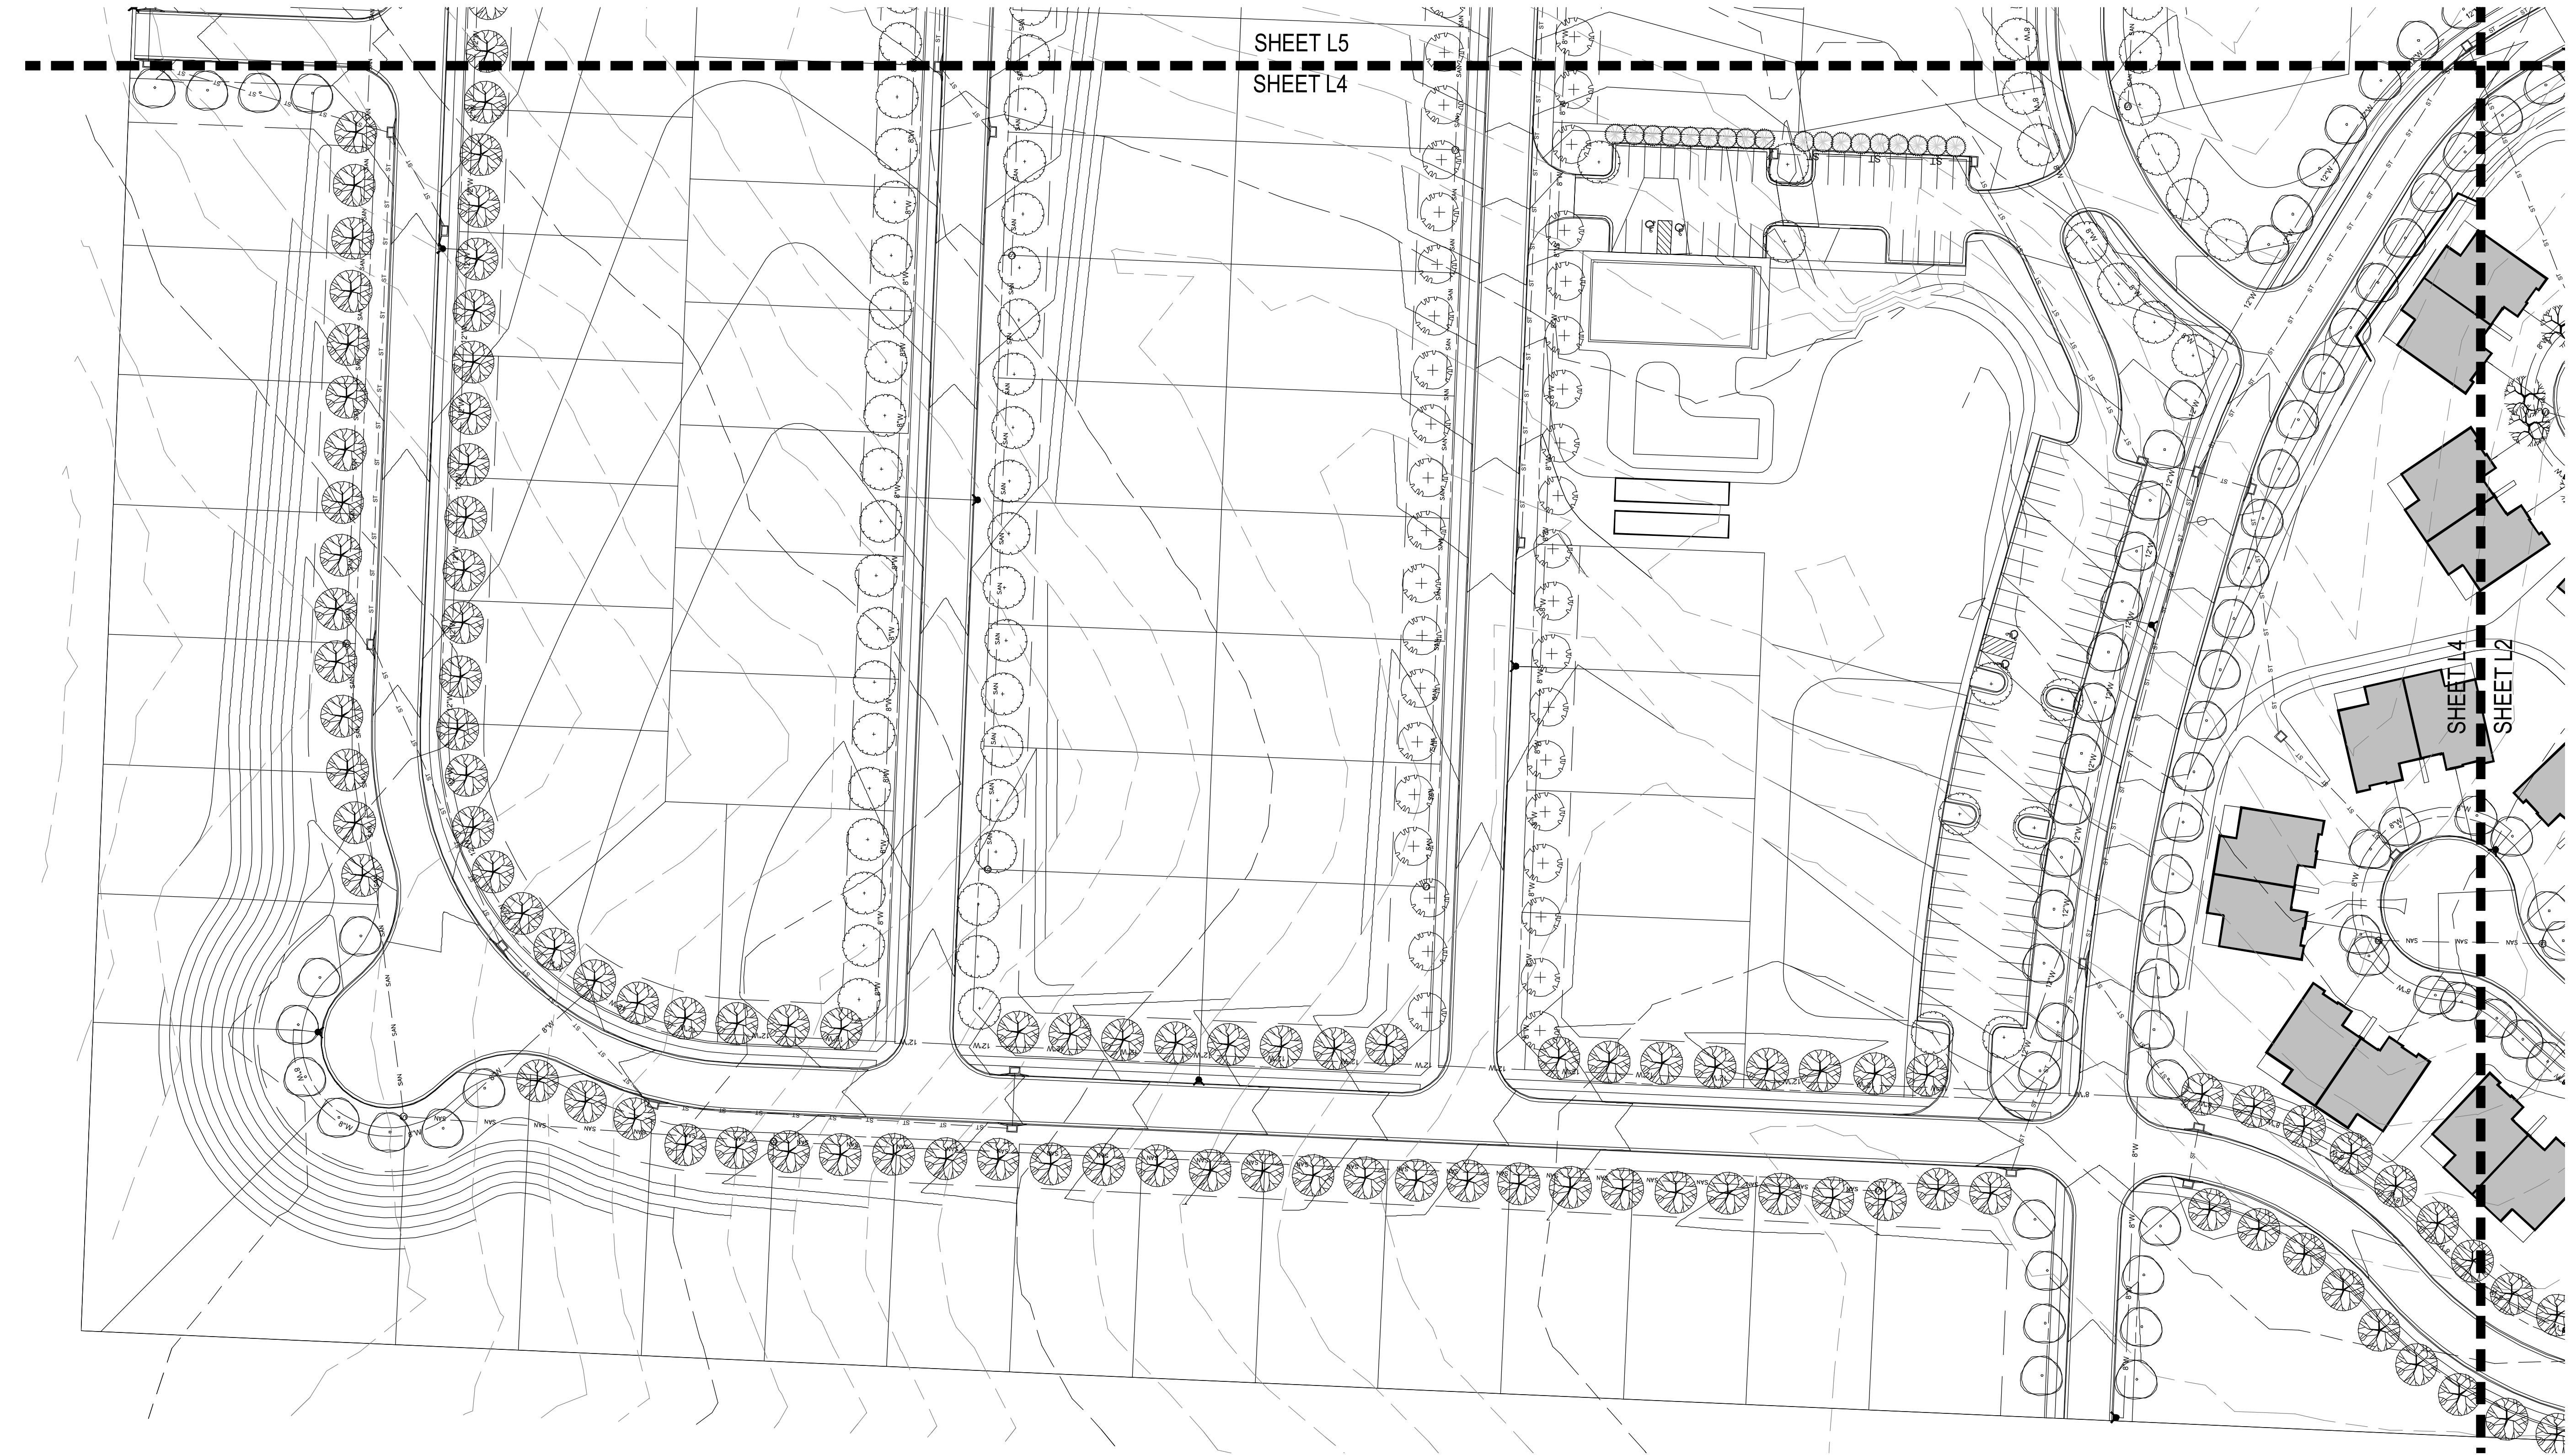


2 LANDSCAPE PLAN ENLARGEMENT
SCALE: 1"=50'-0"



CLIENT
JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT
Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

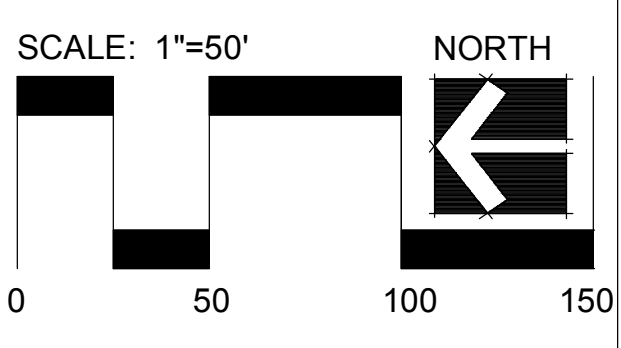

Date: 5.22.18

Landscape Plan


L4

Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
	98	Cedrela trichanthos "Skyline"	Shademaster Honeylocust		3"	6" min. clear., ground to canopy	
	212	Platanus x acerifolia	London Plane Tree		3"	6" min. clear., ground to canopy	
	221	Acer x truncatum "Warrenred"	Pacific Sunset Maple		3"	6" min. clear., ground to canopy	
	230	Quercus bicolor	Swamp White Oak		3"	6" min. clear., ground to canopy	
	242	Acer griseum	Paperbark Maple		3"	6" min. clear., ground to canopy	
	124	Ulmus parvifolia	Lacebark Elm		3"	6" min. clear., ground to canopy	
EVERGREEN TREES							
	34	Juniperus chinensis "Keteleeri"	Keteleeri Juniper		8" ht.	symmetrical pyramidal form	
	00	Picea abies	Norway Spruce		8" ht.	symmetrical pyramidal form	

Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
	00	Cercis canadensis	Eastern Redbud			1.5"	
DECIDUOUS SHRUBS/GRASSES							
	52	Liriodendron muscari "Variegated"	Variegated Liriodendron		1 gal.		Plant @ 18" O.C.
	32	Spiraea x bumalda "Goldflame"	Goldflame Spiraea		3 gal. 18" ht. min.		Plant @ 3' O.C.
	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia		3 gal. 18" ht. min.		Plant @ 4' O.C.
	197	Syringa X "Penda"	Blooming Purple Lilac		5 gal. 18" ht. min.		Plant @ 5' O.C.
EVERGREEN SHRUBS							
	208	Juniperus chinensis "Sea Green"	Sea Green Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.
	182	Juniperus chinensis "Gold Coast"	Gold Coast Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.

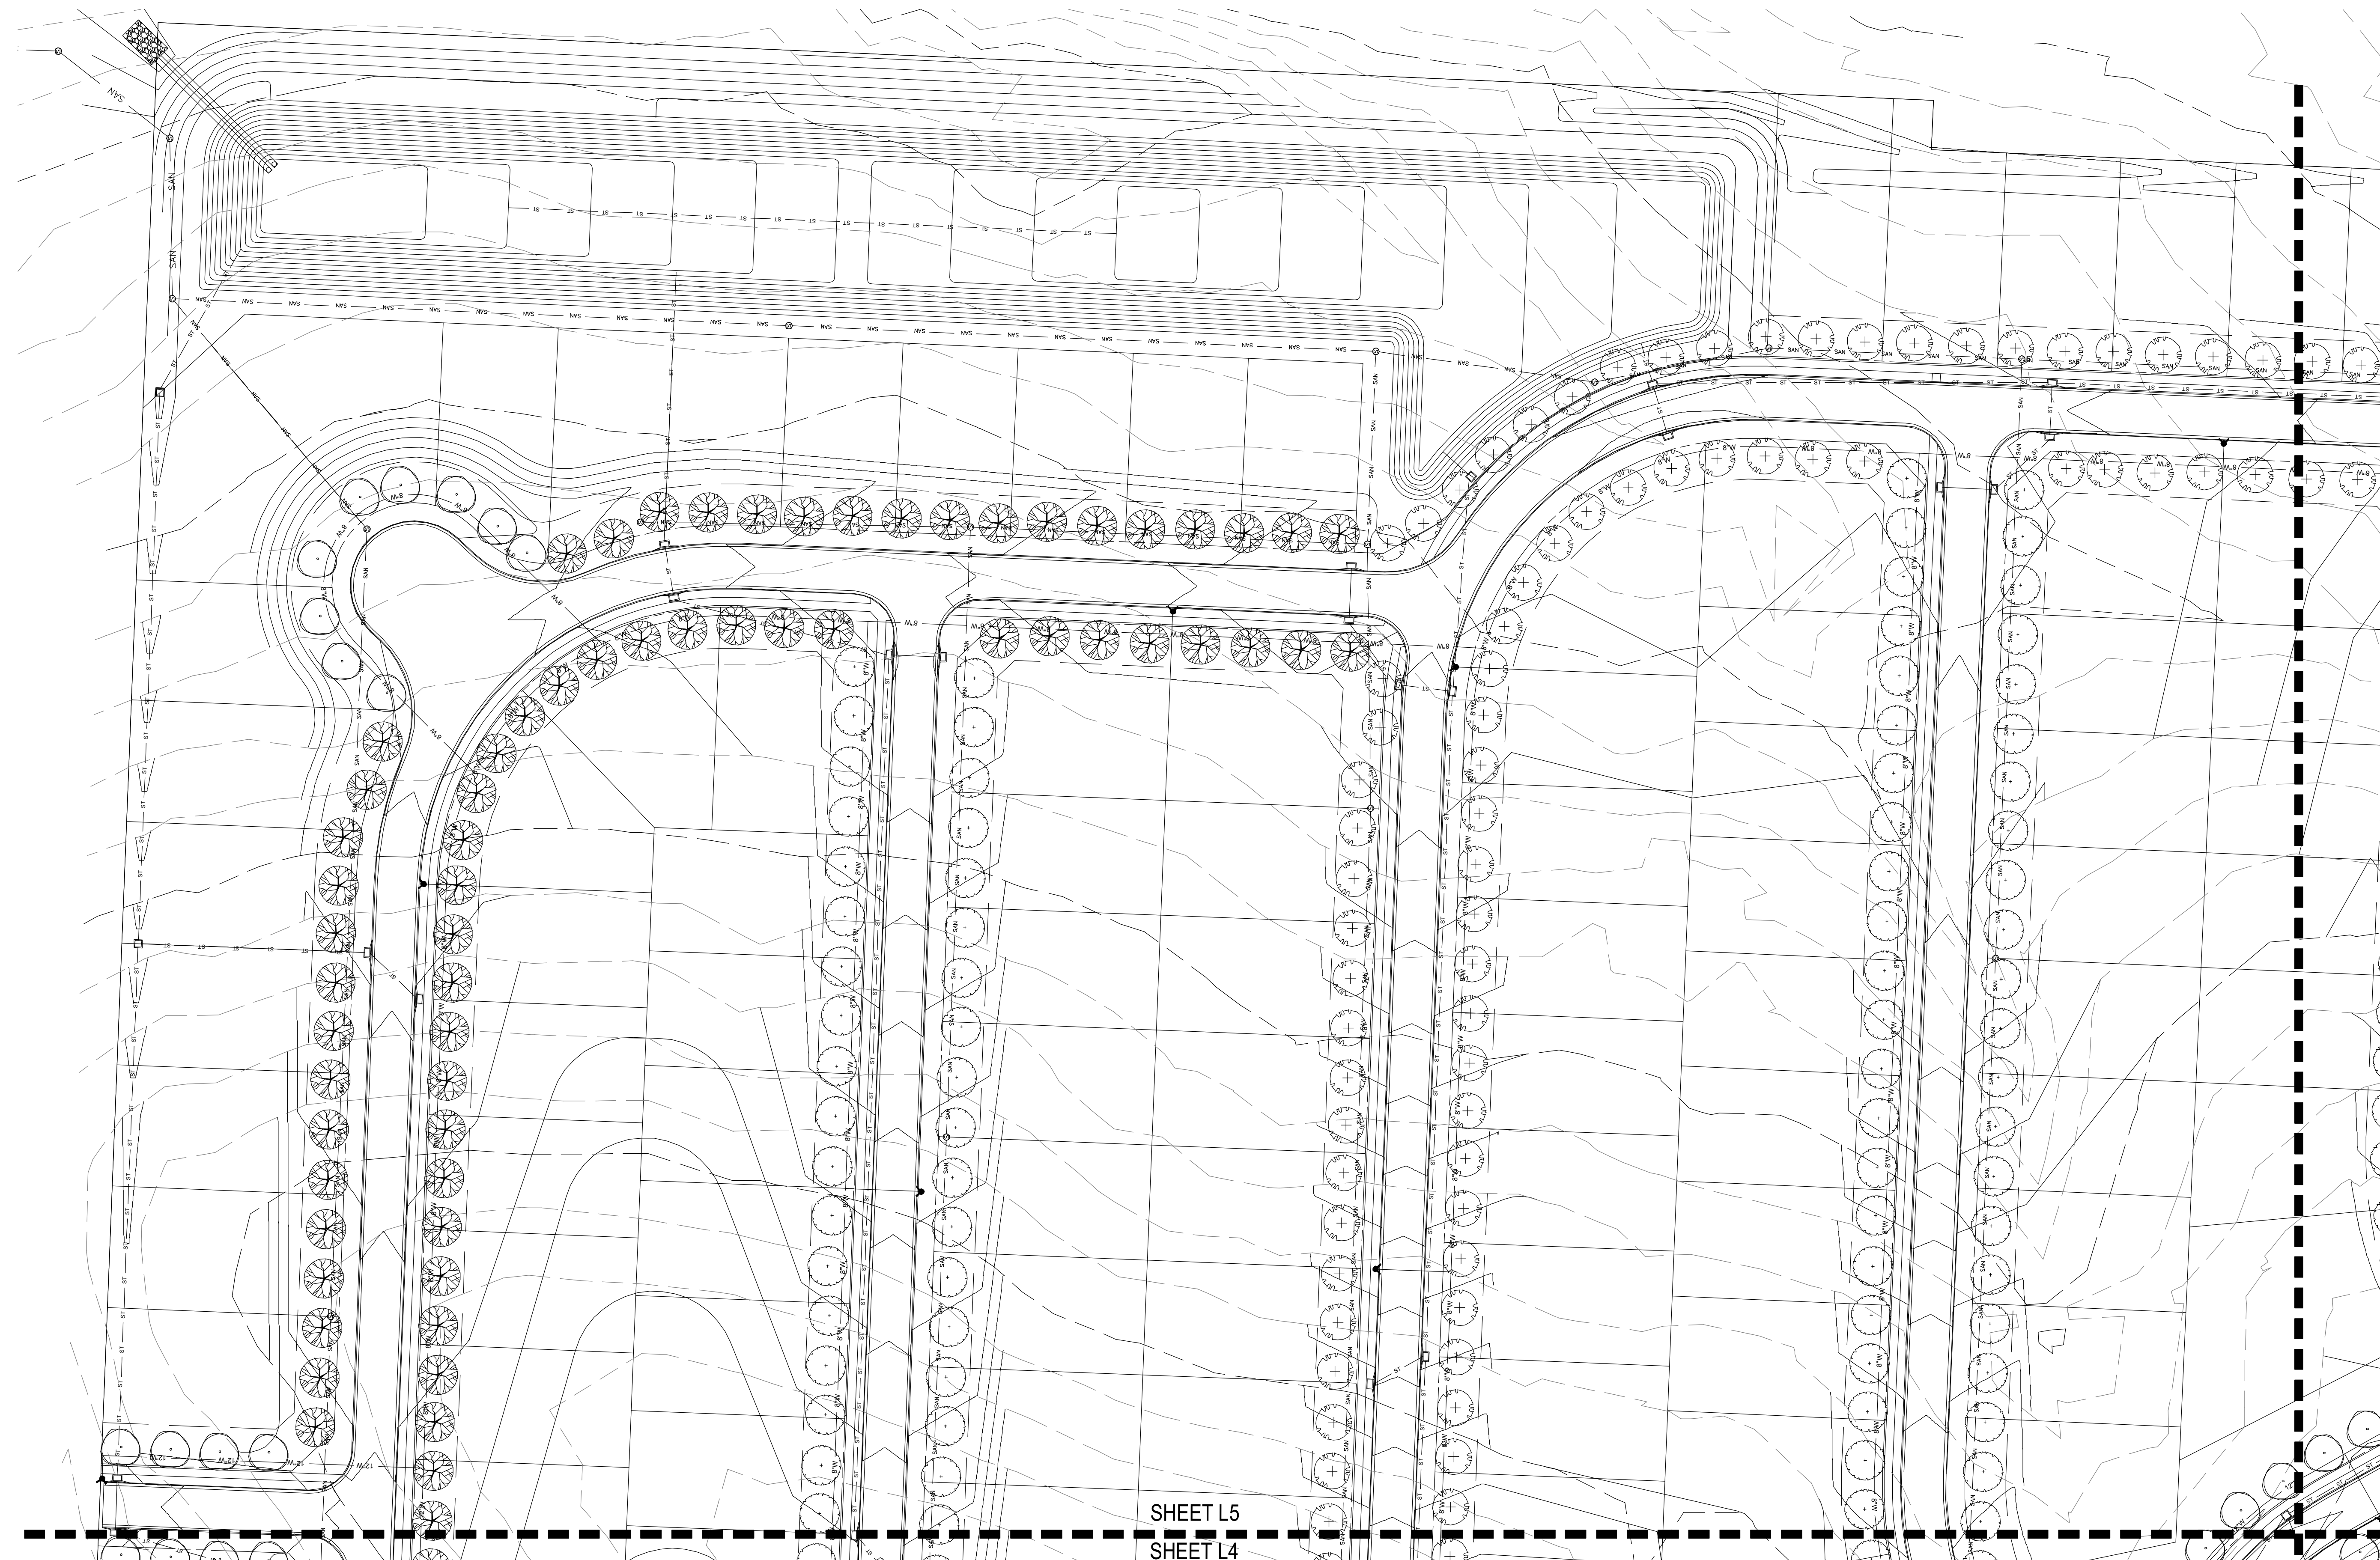

SHEET L5
SHEET L4

1 LANDSCAPE PLAN ENLARGEMENT
SCALE: 1"=50'-0"

MEIER
CONSULTING

Landscape Architecture
Real Estate Consulting
3692 W. 179th Terr.
Stilwell, KS 66085
913.787.2817




CLIENT

JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT

Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

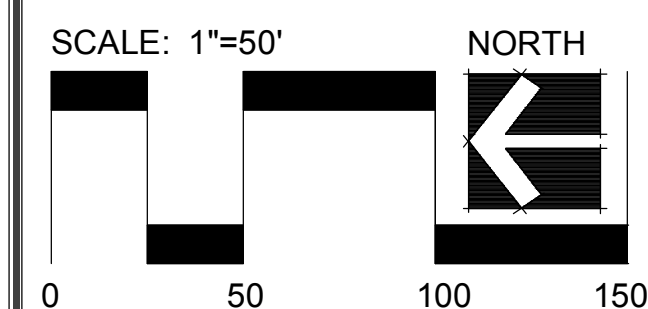

Date: 5.22.18

Landscape Plan


L5

Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
	98	Gleditsia triacanthos "Skyline"	Shademaster Honeylocust	3"	6'	min. clear., ground to canopy	
	212	Platanus x acerifolia	London Plane Tree	3"	6'	min. clear., ground to canopy	
	221	Acer x truncatum "Warrenred"	Pacific Sunset Maple	3"	6'	min. clear., ground to canopy	
	230	Quercus bicolor	Swamp White Oak	3"	6'	min. clear., ground to canopy	
	242	Acer griseum	Paperbark Maple	3"	6'	min. clear., ground to canopy	
	124	Ulmus parvifolia	Loebark Elm	3"	6'	min. clear., ground to canopy	
EVERGREEN TREES							
	34	Juniperus chinensis "Keteleeri"	Keteleeri Juniper	8'	ht.	symmetrical pyramidal form	
	00	Picea abies	Norway Spruce	8'	ht.	symmetrical pyramidal form	


Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
	00	Cercis canadensis	Eastern Redbud			1.5"	
DECIDUOUS SHRUBS/GRASSES							
	52	Liriope muscari "Variegated"	Variegated Liriope	1 gal.			Plant @ 18" O.C.
	32	Spiraea x bumalda "Goldflame"	Goldflame spirea	3 gal. 18" ht. min.			Plant @ 3' O.C.
	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia	3 gal. 18" ht. min.			Plant @ 4' O.C.
	197	Syringa X "Pendo"	Blooming Purple Lilac	5 gal. 18" ht. min.			Plant @ 5' O.C.
EVERGREEN SHRUBS							
	208	Juniperus chinensis "Sea Green"	Sea Green Juniper	3 gal. 18" ht. min.			Plant @ 4' O.C.
	182	Juniperus chinensis "Gold Coast"	Gold Coast Juniper	3 gal. 18" ht. min.			Plant @ 4' O.C.

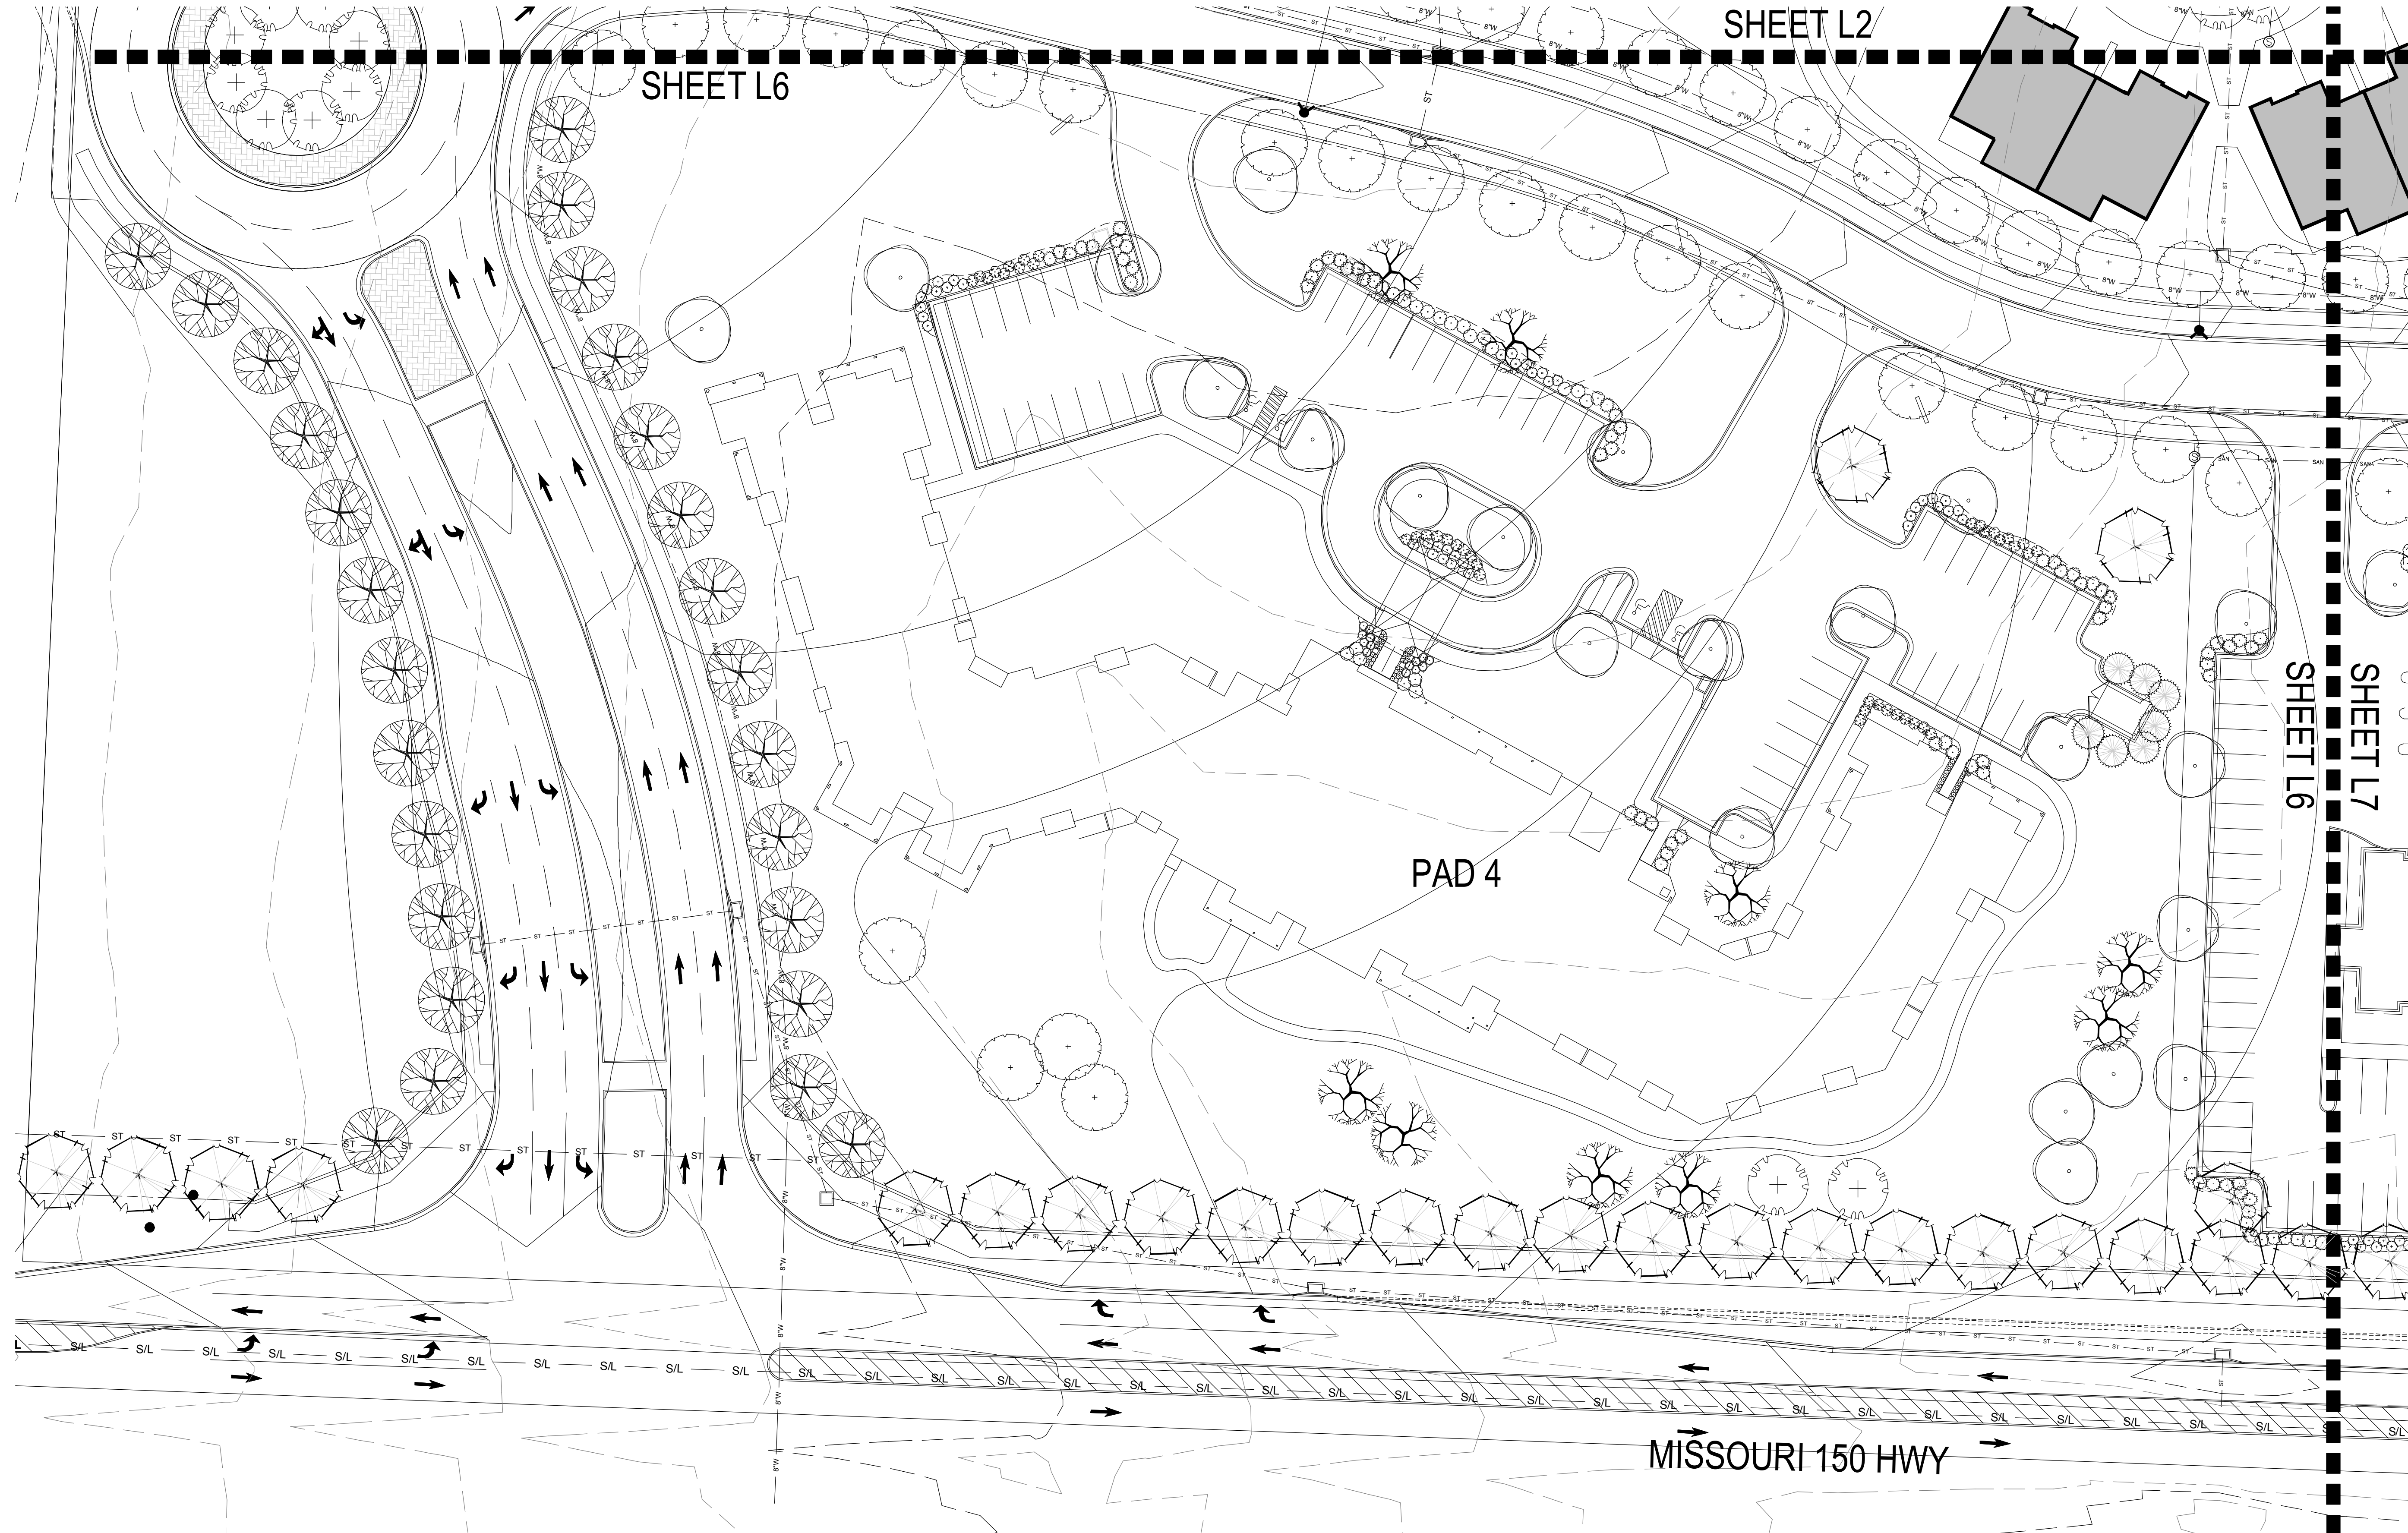

CLIENT
 JFE Construction
 1314 SW Market St.
 Lee's Summit, MO 64081

PROJECT
 Cobey Creek
 Development
 19598 MO-150
 Lee's Summit, MO 64082

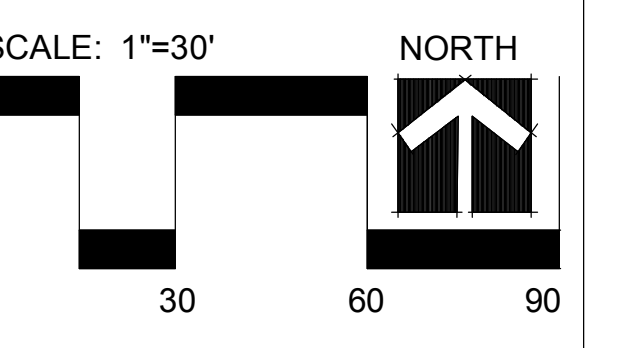



Date: 5.22.18
 Landscape Plan

Landscape Schedule

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
OVERSTORY TREES							
	98	Gleditsia triacanthos 'Skyline'	Shademaster Honeylocust		3"	6' min. clear, ground to canopy	
	212	Platanus x acerifolia	London Plane Tree		3"	6' min. clear, ground to canopy	
	221	Acer x truncatum 'Warrenred'	Pacific Sunset Maple		3"	6' min. clear, ground to canopy	
	230	Quercus bicolor	Swamp White Oak		3"	6' min. clear, ground to canopy	
	242	Acer griseum	Paperbark Maple		3"	6' min. clear, ground to canopy	
	124	Ulmus parvifolia	Loebark Elm		3"	6' min. clear, ground to canopy	
EVERGREEN TREES							
	34	Juniperus chinensis 'Keteleeri'	Keteleeri Juniper		8' ht.	symmetrical pyramidal form	
	00	Picea abies	Norway Spruce		8' ht.	symmetrical pyramidal form	


Landscape Schedule (Cont.)

Symbol	Qty.	Botanical Name	Common Name	Min.Root	Min.Size	Caliper	Remarks
ORNAMENTAL TREES							
	00	Cercis canadensis	Eastern Redbud		1.5"		
DECIDUOUS SHRUBS/GRASSES							
	52	Liriope muscari 'Variegated'	Variegated Liriope		1 gal.		Plant @ 18" O.C.
	32	Spiraea x bumalda 'Goldflame'	Goldflame Spiraea		3 gal. 18" ht. min.		Plant @ 3' O.C.
	165	Abelia x grandiflora Kaleidoscope	Kaleidoscope Abelia		3 gal. 18" ht. min.		Plant @ 4' O.C.
	197	Syringa X 'Penda'	Bloomerang Purple Lilac		5 gal. 18" ht. min.		Plant @ 5' O.C.
EVERGREEN SHRUBS							
	208	Juniperus chinensis 'Sea Green'	Sea Green Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.
	182	Juniperus chinensis 'Gold Coast'	Gold Coast Juniper		3 gal. 18" ht. min.		Plant @ 4' O.C.

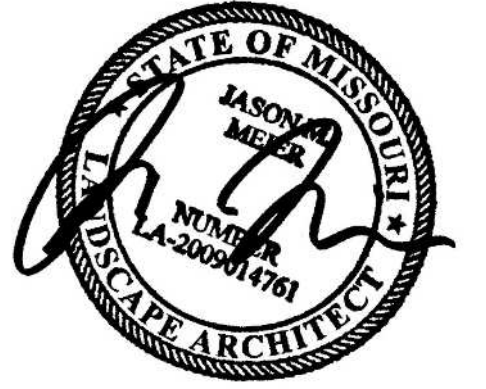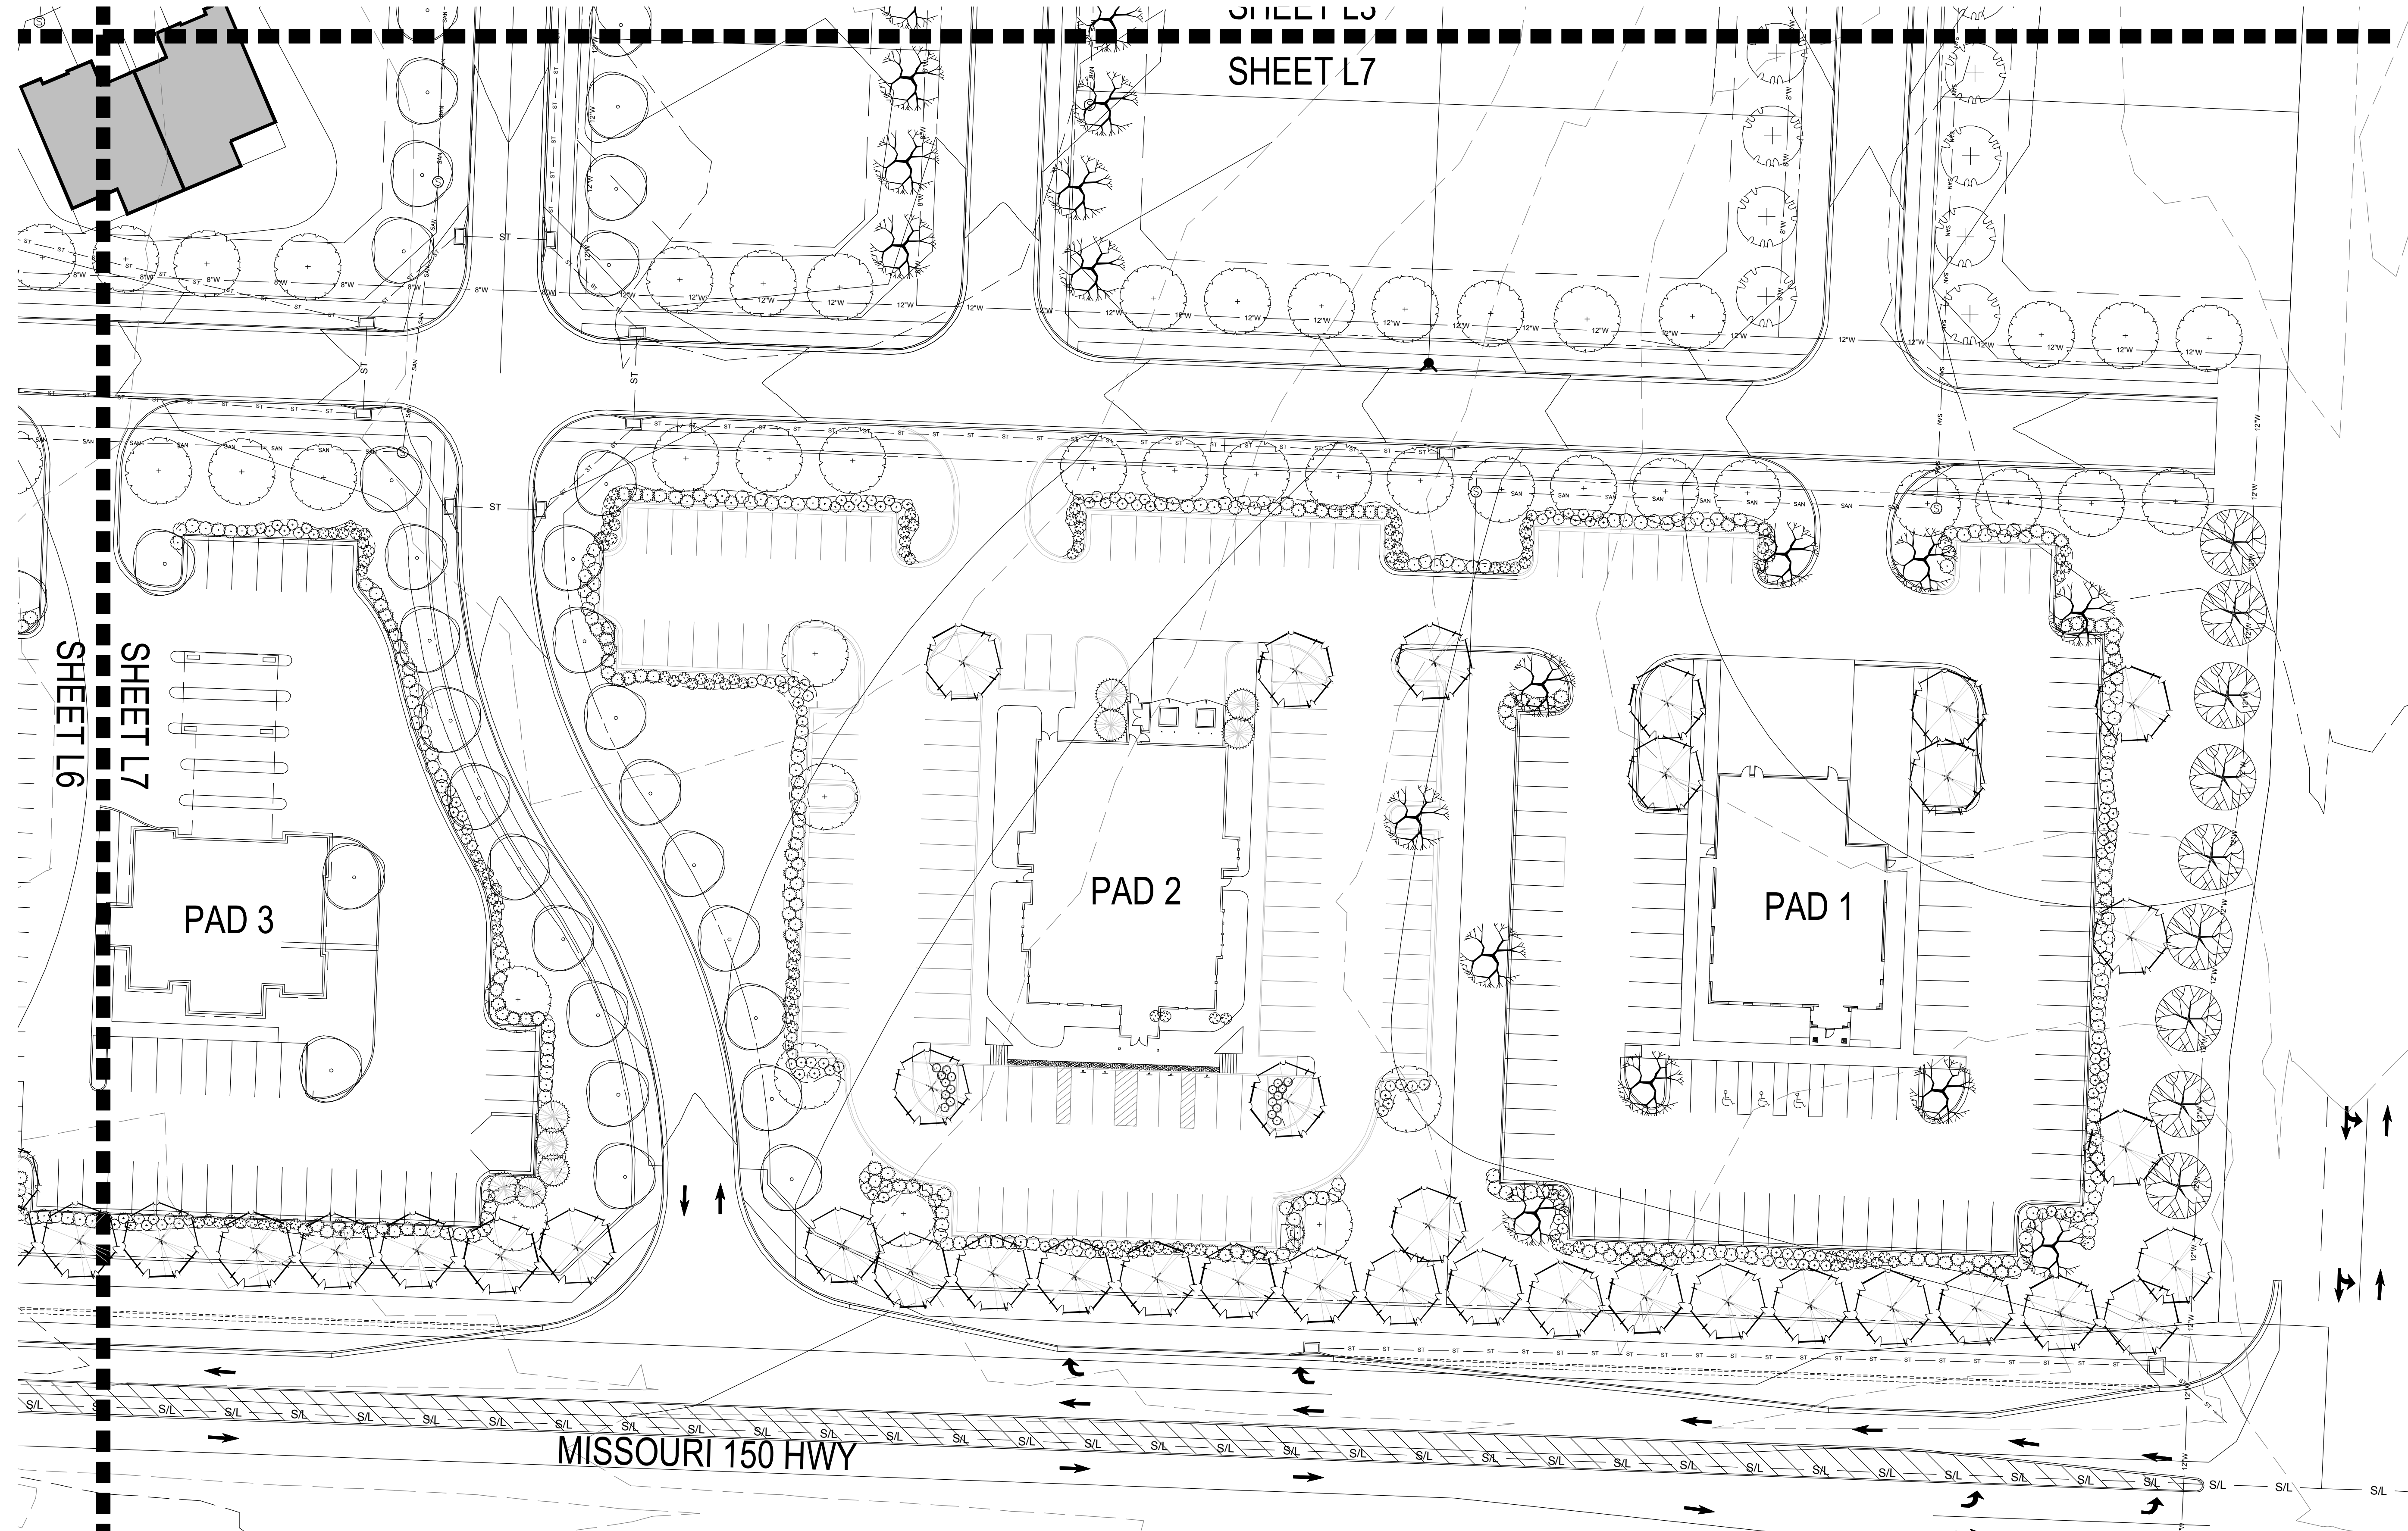

CLIENT
JFE Construction
1314 SW Market St.
Lee's Summit, MO 64081

PROJECT
Cobey Creek
Development
19598 MO-150
Lee's Summit, MO 64082

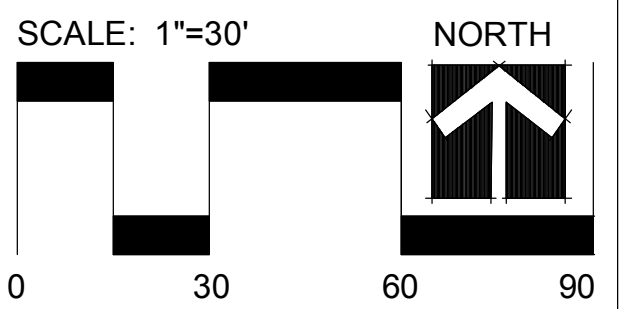

Date: 5.22.18

Landscape Plan

L7